WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) Internati nal Patent Classification 5:

B05B 15/04, B05D 1/32

A1

(11) International Publication Number:

WO 92/18252

(43) International Publication Date:

29 October 1992 (29.10.92)

(21) International Application Number:

PCT/US92/02030

(22) International Filing Date:

13 April 1992 (13.04.92)

(30) Priority data:

9108385.7

19 April 1991 (19.04.91)

GB

(71) Applicant (for all designated States except US): MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): BASTOW, David, R. [GB/GB]; 64 Deltic, Glascote Heath, Tamsworth, Staffordshire B77 2DU (GB).


(74) Agents: HUEBSCH, William, L. et al.; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States: AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, KR, LU (European patent), MC (European patent), NL (European patent), SE (European patent), US.

Published

With international search report.

(54) Title: MASKING METHODS USING A FOAM WEB



(57) Abstract

A masking element comprising a foam web (2) formed into a closed curve defining upper and lower surfaces with a layer of adhesive on at least its lower surface for mounting the element on a substrate.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	Fļ	t-inland	Ml.	Mali
BB	Barbados	FR	l-rance	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
	Burkina Faso	GB	United Kingdom	MW	Malawi -
BF		GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Henin	HU	Hungary	PL	Poland
BR	Brazil	nt	- •	RO	Romania
CA	Canada		Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan		
CG	Congo	KP	Democratic People's Republic	SD	Sudan
CH	Switzerland		of Korea	SE	Sweden
	•••••	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	L	Licchtenstein	SU	Soviet Union
CM	('ameroon		Sri Lanka	TD	Chad
CS	Czczhoslovakia	LK		TG	Togo
DE	Germany	LU	i usembourg		United States of America
DK	Denmark	MC	Monaco	US	United States of America
5.0					

MASKING METHODS USING A FOAM WEB

Technical Field

The present invention relates to the masking of an surposed area of a surface from an adjacent area to facilitate treatment of the exposed area by for example paint spraying. The invention has particular, but not exclusive application in the motor industry where selective repairs must be effected on painted surfaces.

10 The invention also relates to a masking element for use in such methods.

Background Art

Various masking techniques are known for isolating
15 areas from adjacent areas on a surface. Such isolation
is needed in a number of situations where treatment of
one form or another is to be applied exclusively to a
specific area or region. Masking techniques are
particularly useful when the treatment involves the
20 application of a fluid medium. Examples are chemical
treatments, painting and decorating. Typically, the
treatment areas are isolated from their surroundings by
a masking tape which defines the boundary thereof.

25 <u>Disclosure of Invention</u>

The present invention is directed at a masking element which can be manufactured and sold as a complete unit ready for immediate use. More particularly, the invention provides a masking element comprising a foam 30 web formed into a closed curve defining upper and lower surfaces, with a layer of adhesive on at least the lower surface for mounting the element on a substrate. The closed curve is typically circular or elliptical, but can be polygonal or any ch sen shape. The actual form of the 35 curv is not critical, but is preferably chosen such that a plurality of lements can be form d simultaneously from a singl sh et of material. Such a plurality of elements

can be arranged c ncentrically, and stamp d from such a sheet simultaneously. Further, such a plurality of lements can be marketed in this form, with elements being available for removal from the sheet as they are required.

Preferred masking elements according to the invention are formed from a foam material, and can conveniently be stamped from a sheet of foam which already has a layer of adhesive on at least one face thereof. The inner and outer peripheries of the element can be defined by pressure welded seams formed during the stamping, and where a plurality of concentric elements are formed simultaneously, radially adjacent elements can be attached to each other along their respective peripheries, and by such pressure welded seams, which may be readily tearable.

Brief Description of Drawing

The invention will now be described by way of 20 example and with reference to the accompanying schematic drawings wherein:

Figure 1 is a plan view of a circular masking element according to the invention;

Figure 2 is a section taken on line A-A of Figure 1;
Figure 3 is a plan view of a sheet of material in which a plurality of masking elements of the invention have been stamped out;

Figure 4 is a perspective view of a part of a car hood; and

Figure 5 is cross-section taken on line V-V of Figure 4.

Detailed Description

As shown in Figures 1 and 2, a masking elem nt 35 according to the invention takes the f rm of an endless length 2 of foam web having a generally elliptical cross-s ction. On the lower surface of the web 2 is

applied an adhesive c ating 4, which as can be seen from Figur 2, extends ar und substantially half the peripheral surface of th web 2. A typical height of the section shown in Figure 2 is 15mm, and a typical breadth is 20mm. These are preferred minimum values for webs made from polyether foam which is particularly suitable, but other plastics foams can also be satisfactory. Similarly, a typical minimum outside diameter for a masking element of the kind shown in Figure 1 is 95mm, which enables the element to isolate an area of around 70cm².

The foam web forming the mask element shown in Figures 1 and 2 is as noted above, preferably a plastics foam. Typically, it can be a foam made in accordance 15 with our published European Patent Specification No. 0384626, with pressure welded seams 6 defining either lateral side of the web section. Forming the element in this way makes it particularly suitable for batch production, in which a plurality of elements can be 20 simultaneously stamped out of a sheet of foam material, broadly as illustrated in Figure 3.

In Figure 3 five concentric elements are shown formed in a sheet 8 of foam material. The webs 2a, 2b and 2c of radially adjacent elements are separated from 25 one another by pressure welded seams 6a and 6b. The seams are tearable, but as shown the sheet 8 remains intact under normal handling conditions. When one of the elements is required, its respective seams are torn to separate it from the remainder of the sheet.

The sheet 8 shown in Figure 3 may have a layer 4 of adhesive (not shown) coated thereon prior to it being stamped to identify the respective masking elements. After stamping, and as shown in Figure 2. The material contracts ar und th body f each web 2 resulting in th adhesive coating 4 extending around either side f the web. It will be appreciated that an adhesive coating f this form may be applied to both surfaces of the foam 8,

WO 92/18252 PCT/US92/02030

- 4 -

The adhesive coatings n ed not be f the same aggressive strength. Reference is directed to our co-pending Application filed today in respect of an invention relating to the use of strips similar to the web 2 described herein with two adhesive coatings. Release liners can also be applied to the sheet 8 to facilitate handling not only of the sheet, but also of the masking elements formed therein. If desired, the release liners can be cut into separate rings, or perforated to permit easy separation.

Figures 4 and 5 illustrate the use of a masking element according to the invention. Figure 4 shows the front section of a car hood 10, most of which is to be re-painted. An emblem 12 is mounted on the hood 10, and as the paintwork around the emblem 12 does not require re-painting, this area of the hood is to be isolated from the remainder. To achieve this, an endless element 14 according to the invention is mounted on the hood 10 to surround the emblem 12. This is shown more clearly in Figure 5.

As shown in Figure 5, the web 2 of the element 14 is secured to the hood 10 by the adhesive layer 4. In this embodiment, an adhesive coating 16 is also formed on the opposite surface of the web 2, and a sheet 18 of paper or other suitable material is laid thereover and attached to the web 2 by the adhesive 16 to protect the emblem and its immediate surroundings. Alternatively of course, an adhesive coating can be separately applied to the web 2 or the sheet 18 could be formed with an adhesive coating of its own suitable for securing the sheet to the uncoated exposed surface of the web 2.

The sheet 18 can be cut to size before or after attachment to the element 14. In some embodiments of the invention, the lement 14 can be provided with a masking sheet already attached. Generally though, elements according to the invention will be provided without such

sh ets, and usually in a batch as illustrated in Figure 3. This will permit the el ment to be used t mask an enclos d ar a as illustrated in Figures 4 and 5, or to surround such an enclosed area while leaving it exposed for treatment. In the latter application, any sheet of material applied will extend outwards from the element rather than inwards.

Elements according to the invention have particular benefit in effecting paint repairs. The use of a foam 10 web facilitates the achievement of a soft edge between painted and unpainted areas. However, the elements are also useful in applying other surface treatments such as coating, plating and phosphorizing.

PCT/US92/02030


CLAIMS


- A masking element comprising a f am web f rmed into a closed curve defining upper and lower surfaces
 with a layer of adhesive on at least the lower surface for mounting the element on a substrate.
 - 2. A masking element according to Claim 1 wherein the closed curve is a circle.


10

- 3. A masking element according to Claim 1 wherein the closed curve is a polygon.
- 4. A masking element according to any preceding 15 Claim wherein said upper and lower surfaces are curved.
 - 5. A masking element according to Claim 4 wherein the web has an elliptical cross-section.
- 20 6. A masking element according to any preceding Claim wherein the web is stamped out in the shape of the closed curve from a sheet of foam with a layer of adhesive on one face thereof.
- 7. A masking element according to Claim 6 wherein the inner and outer peripheries of the element are defined by pressure welded seams formed during the stamping.
- 8. A plurality of substantially concentric masking elements according to Claim 6 or Claim 7 formed in a common sheet of foam.
- A plurality of elements according to Claim 8
 herein radically adjacent elements are attached to ach other along resp ctive peripheri s thereof.

10. A plurality according to Claim 9 or elements according to Claim 7 wher in adjacent elements are attached by tearable pressure welded seams.

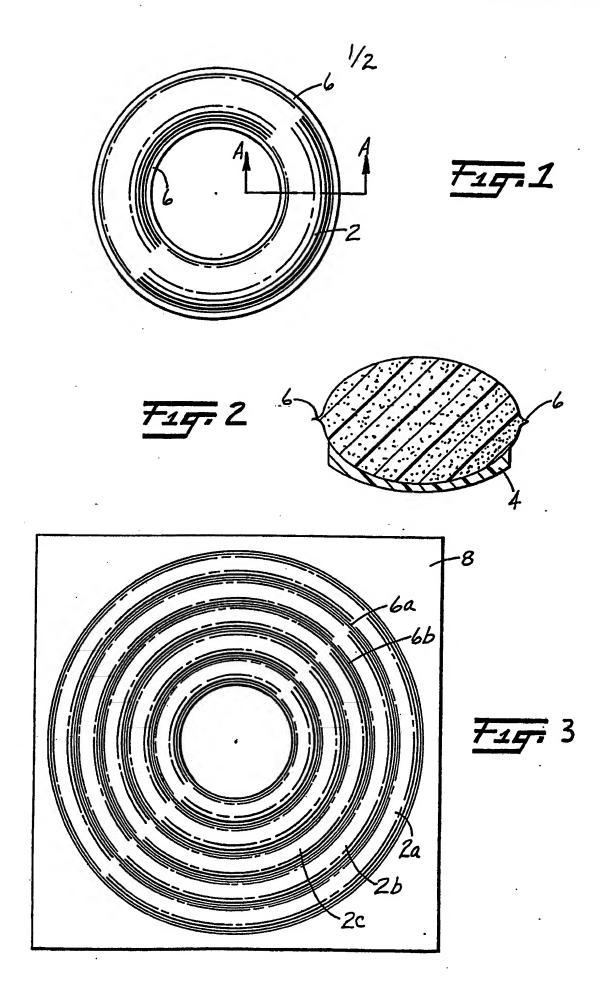

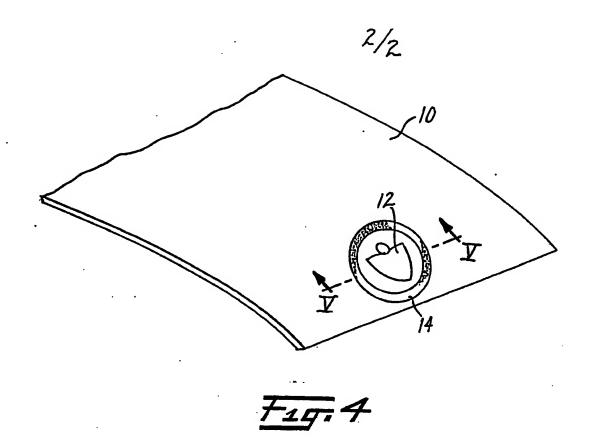

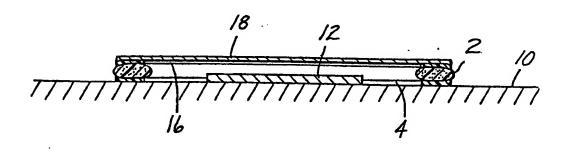

F15. 5

International Application No

1. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all)6						
		ECT MATTER (if several classification (IPC) or to both National				
	5 B05B15/0		CASSINGATION WIS IN C			
II. FIELDS	SEARCHED					
		Minimum Docum	nentation Searched?			
Classificati	on System		Classification Symbols			
Int.Cl.	5	B05C				
			r than Minimum Documentation ; are included in the Fields Searched ⁶			
		D TO BE RELEVANT	12			
Category °	Citation of Do	ocument, 11 with indication, where approp	trate, of the relevant passages 44	Relevant to Claim No.13		
x		312 201 (DECKER) 18 Oc whole document	tober 1984	1,2		
A	EP,A,O 384 626 (MINNESOTA MINING AND MANUFACTURING COMPANY) 29 August 1990 cited in the application see the whole document					
Α .		015 668 (FRESCO LINE)				
A	BE, <u>A</u> ,1 (001 535 (SILVESTRE) 21	November 1989			
"A" doct con: "E" earli filin "L" doct which citat "O" doct other	sidered to be of partice ler document but publi g date ment which may throw the is cited to establish tion or other special re- ument referring to an er means	peral state of the art which is not plar relevance ished on or after the international w doubts on priority claim(s) or the publication date of another escos (as specified) oral disclosure, use, exhibition or to the international filling date but	state of the art which is not cited to understand the principle or theory underlying the invention of priority claim(s) or publication date of another (as specified) disclosure, use, exhibition or definition of international filing date but or priority sate and not in connect with the principle or theory underlying the invention cannot be considered as one or cannot be considered to involve an inventive step when the document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.			
IV. CERTIF						
Date of the		the International Search JULY 1992	Date of Mailing of this International Search			
International	Searching Authority EUROPEA	AN PATENT OFFICE	Signature of Authorized fficer JUGUET J.M.			
DOTO A	tio (second short) (James	v 1945	1			
		·	•			

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO. US 9202030 59843

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.

The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 21/07/92

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
DE-A-3312201	18-10-84	None		
EP-A-0384626	29-08-90	CA-A-	2009721	20-08-90
WO-A-9015668	27-12-90	SE-B- AU-A- SE-A-	463656 5846690 8902153	07-01-91 08-01-91 16-12-90
BE-A-1001535	21-11-89	AU-A- WO-A- EP-A- JP-T-	4214589 9003228 0365510 3501464	18-04-90 05-04-90 25-04-90 04-04-91